



grid

## grid tech specs

|                           |                                                    |                                                        |
|---------------------------|----------------------------------------------------|--------------------------------------------------------|
| Construction              | Pattern Colour Placement                           |                                                        |
| Yarn                      | 100% Stainproof SDX Nylon                          |                                                        |
| Colour system             | 100% Solution Dyed                                 |                                                        |
| Total Weight              | +/- 3900 GSM                                       |                                                        |
| Backing                   | NecBac SX                                          |                                                        |
| Tile Size                 | 50cm X 50cm                                        |                                                        |
| Packing                   | 20 Tiles/Box (5.00 SQM)                            |                                                        |
| Area of Use               | Class 33                                           | Heavy Commercial                                       |
| Fire Class                | EN 13501                                           | Bfl-s1                                                 |
| Colour Fastness           | Light: 7   Rubbing: (Dry) 4-5   Rubbing: (Wet) 4-5 |                                                        |
| Electrostatic Propensity  | EN 1307                                            | <2.0Kv (CE Market)                                     |
| Sound Absorption (NexBac) | EN ISO 354:2003                                    | aw: 0.15                                               |
| Sound Insulation (NexBac) | ISO 354:2003                                       | 18 dB                                                  |
| Dimensional Stability     | ISO 986:2006                                       | Shrinkage & Expansion < 0.2% in both directions        |
| VOC Tested                | ASTM D5116                                         | TVOC Emission Rates within limits (GBCSA / GBCA / CRI) |
| Castor Chair Suitability  | NF EN 985                                          | Intensive Use                                          |
| Warranty                  | 15 Year                                            |                                                        |
| Guarantee                 | 5 Year                                             |                                                        |

## grid



**DRYLAND**



**CLOUD BREAK**



**THUNDER**




**SUNRISE**



**HORIZON**



**SUNSET**

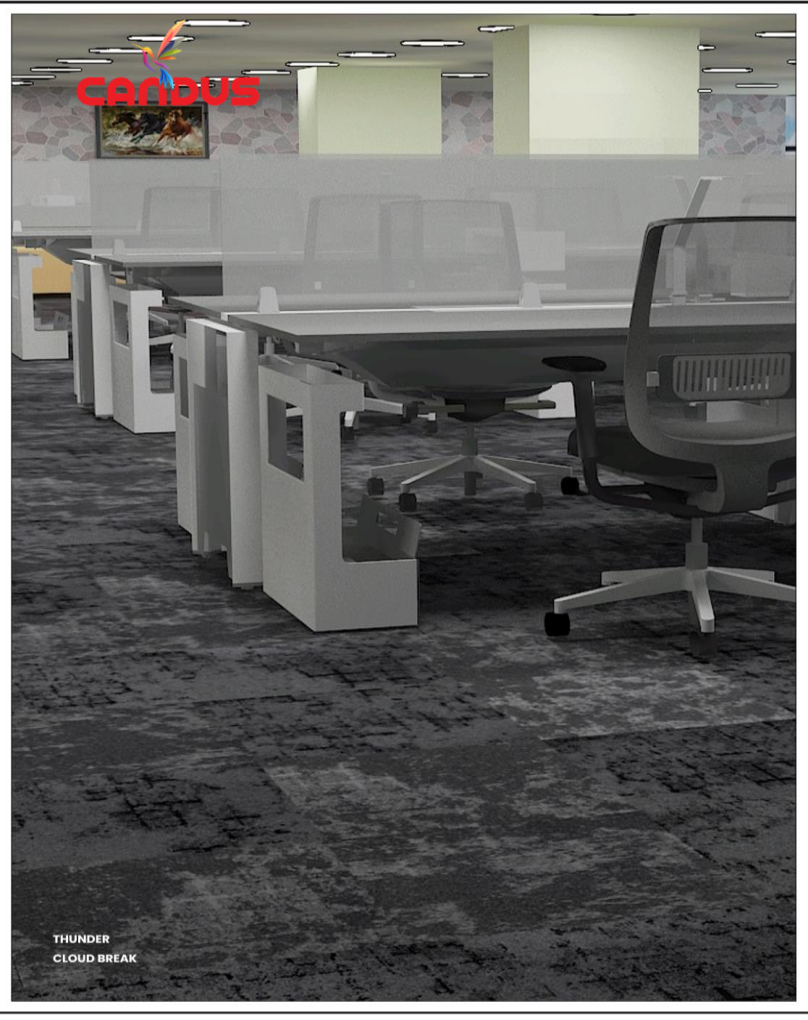

**CANDUS**

THUNDER  
CLOUD BREAK



SUNRISE



**CLOUDBREAK  
SUNSET**



HORIZON  
THUNDER  
SUNRISE